

KEYS TO EXIT OR TERMINATE COMMAND LEVELS

KEY	USE
ESC	To exit ? command mode or any other level of command
0 (zero)	To exit Configure, Setup, Edit and to exit phone number and log on subcommands of Setup
RTN (RETURN)	To terminate entry of names, phone numbers within commands
CTRL-1	To terminate entry or modification of log on sequence in Setup
CTRL-SHIFT-Q	To terminate entry or modification of text files in Edit

DEFAULT CONFIGURATION

When the cartridge is originally installed, configuration options have default settings. You can reset each one individually or restore them all to their defaults with the Configure command. The defaults are:

LINE CONTROL

- No disconnect on EOT
- No disconnect on DLE plus EOT

TERMINAL CONTROL

- No carriage return for LF
- No line feed for CR
- No LF transmitted when RTN pressed
- Control characters not printed
- Bell does not sound at column 72

MODEM (MODEL 707 ONLY)

- Tone dialing in effect
- Telephone answered after 5 rings

SPECIAL KEY FUNCTIONS

Hold CTRL & SHIFT down; then press the corresponding key

SPECIAL KEY FUNCTIONS FOR SETUP AND EDIT

CTRL-SHIFT-R	Recognize character
CTRL-SHIFT-\$	Delay (one second)
CTRL-SHIFT-+	Wait for RTN
CTRL-SHIFT-P	Pulse dial
CTRL-SHIFT-T	Tone dial
CTRL-SHIFT-space bar	Move forward
CTRL-SHIFT-H	Backspace
CTRL-SHIFT->	Skip forward

SPECIAL KEY FUNCTIONS FOR EDIT ONLY


CTRL-SHIFT-<	Skip backward
CTRL-SHIFT-E	End of file
CTRL-SHIFT-B	Beginning of file
CTRL-SHIFT-L	List file
CTRL-SHIFT-I	Insert
CTRL-SHIFT-D	Delete
CTRL-SHIFT-Q	Quit edit

Symbols

?	Command mode prompt
W	Indicates RTN must be pressed to continue dialing or log on
Q	Indicates a one-second delay in dialing or log on
P	Indicates pulse dial (Model 707 only)
T	Indicates tone dial (Model 707 only)
- (space)	Separates parts of phone number
+	Valid characters for tone dial
~	Recognize next character
^	Indicates current character deleted
^	Device Control 1 (DC1) control character
^	Indicates RTN in sequence

Editing Buffer Cartridge

Quick Reference Card

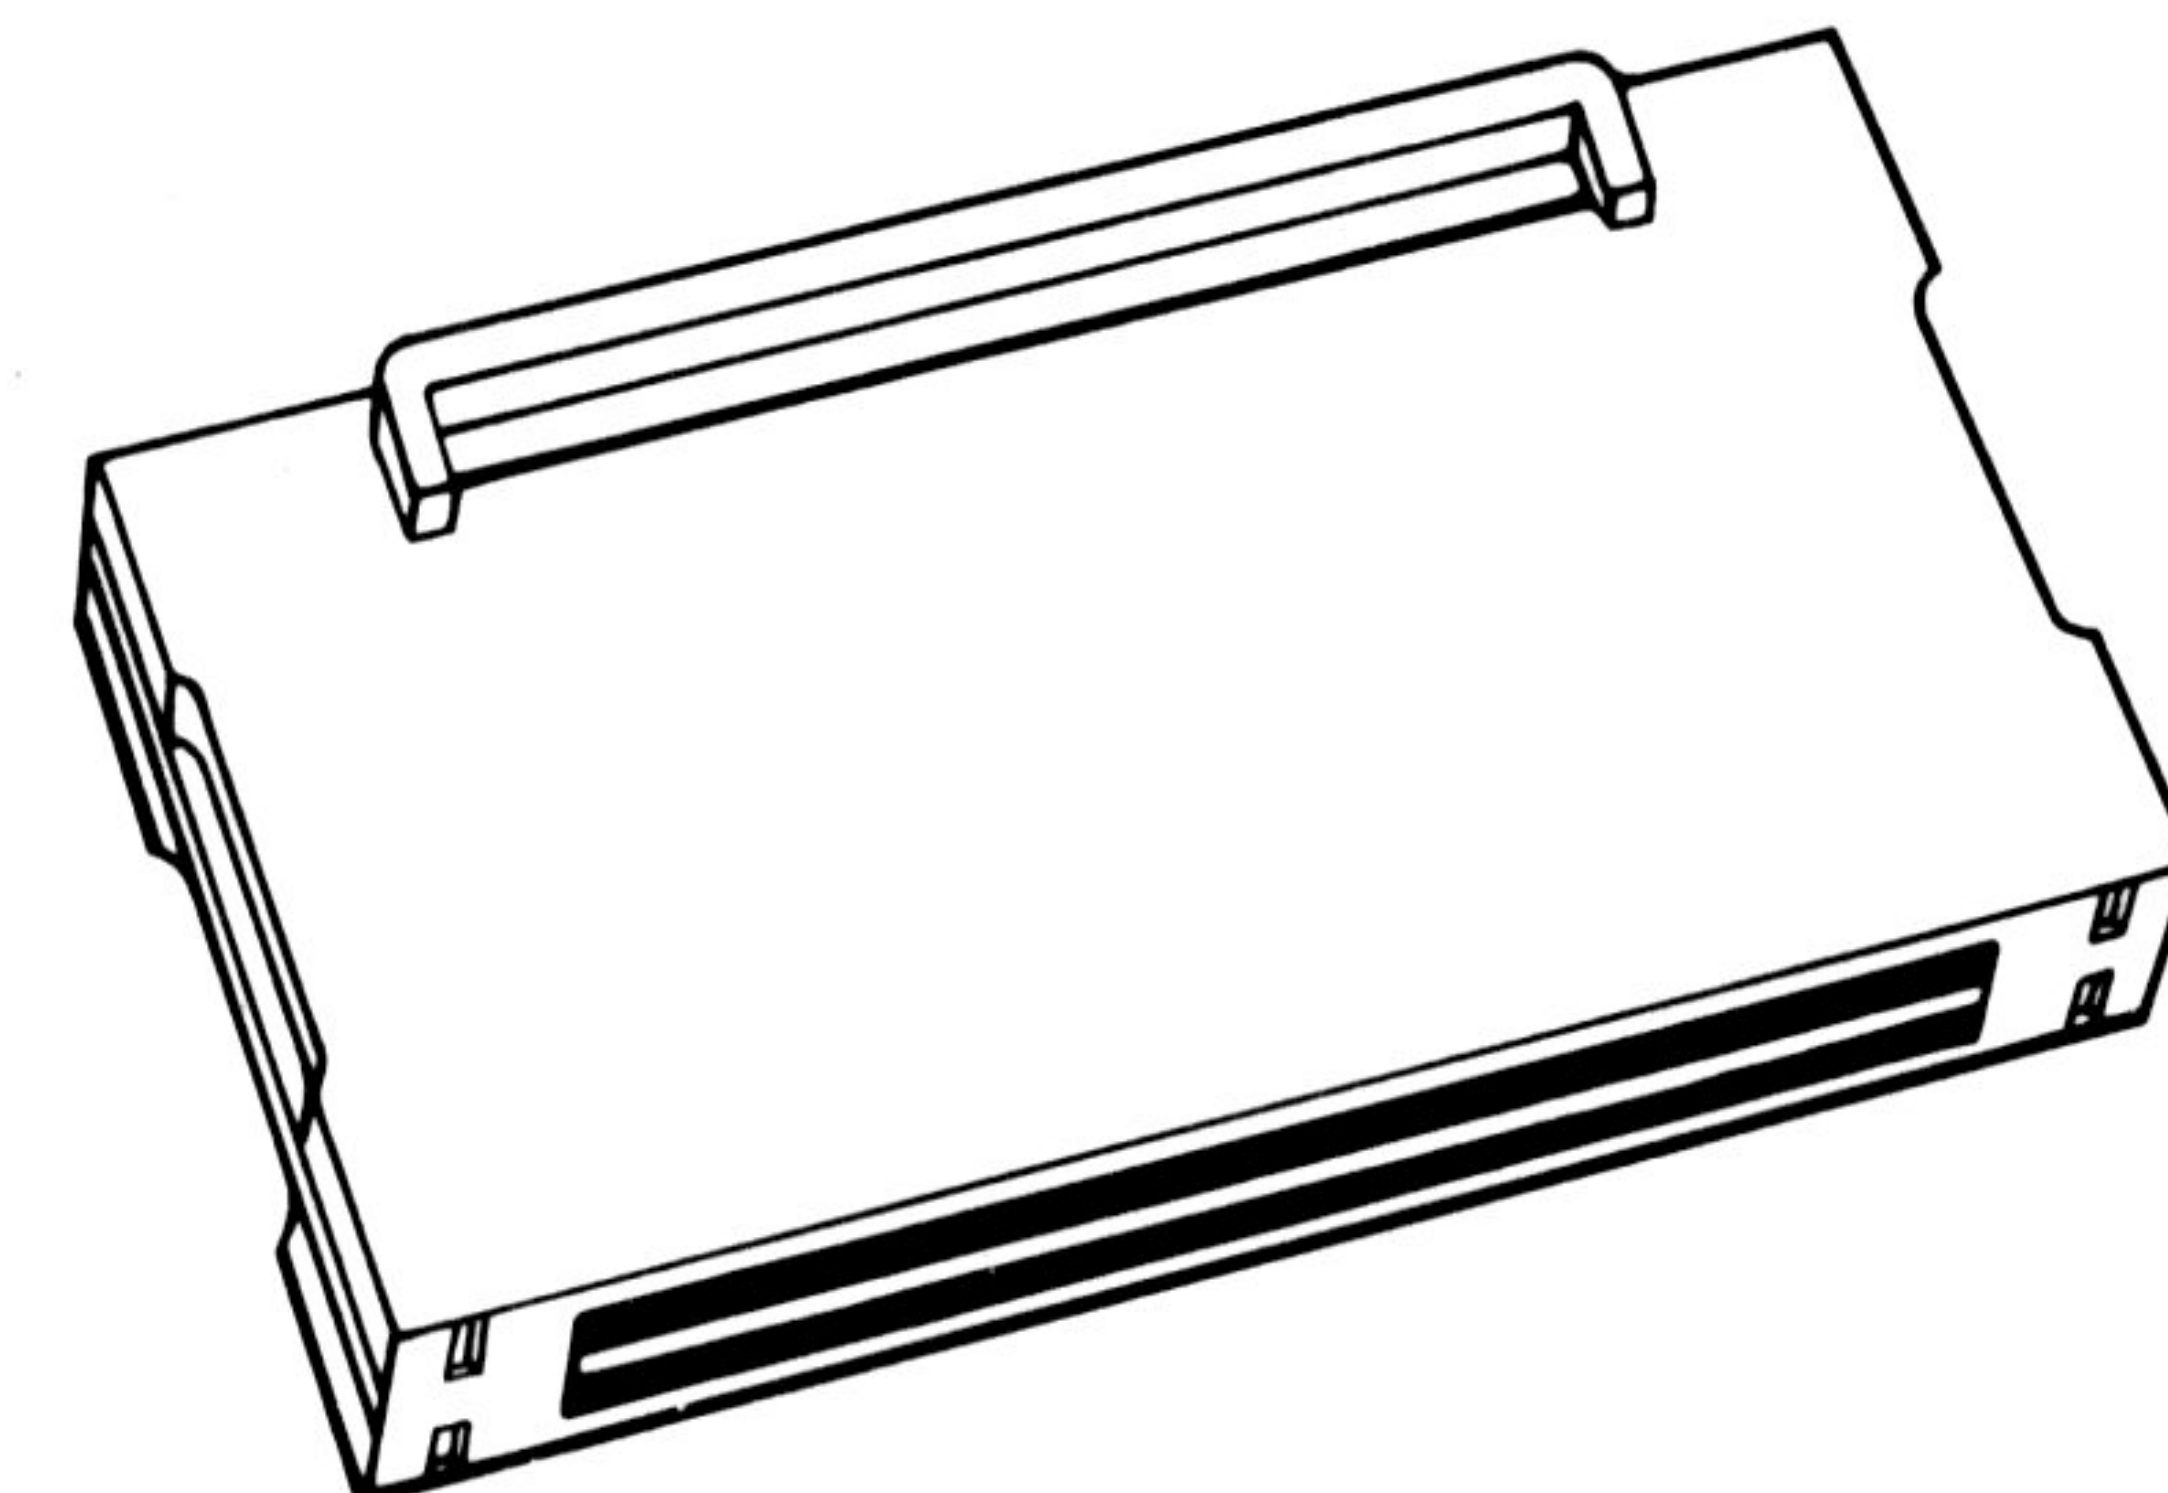

Texas Instruments reserves the right to change its product and service offerings at any time without notice.

TI Part No. 2242770-0001


Printed in U.S.A.



**TEXAS
INSTRUMENTS**

TO INSTALL THE CARTRIDGE


1. Place terminal POWER switch off.
2. Unlatch and open paper compartment cover.
3. Insert cartridge in cartridge slot.
4. Push cartridge down until flush with top of slot.
5. Close and latch paper compartment cover.
6. Place terminal POWER switch on.

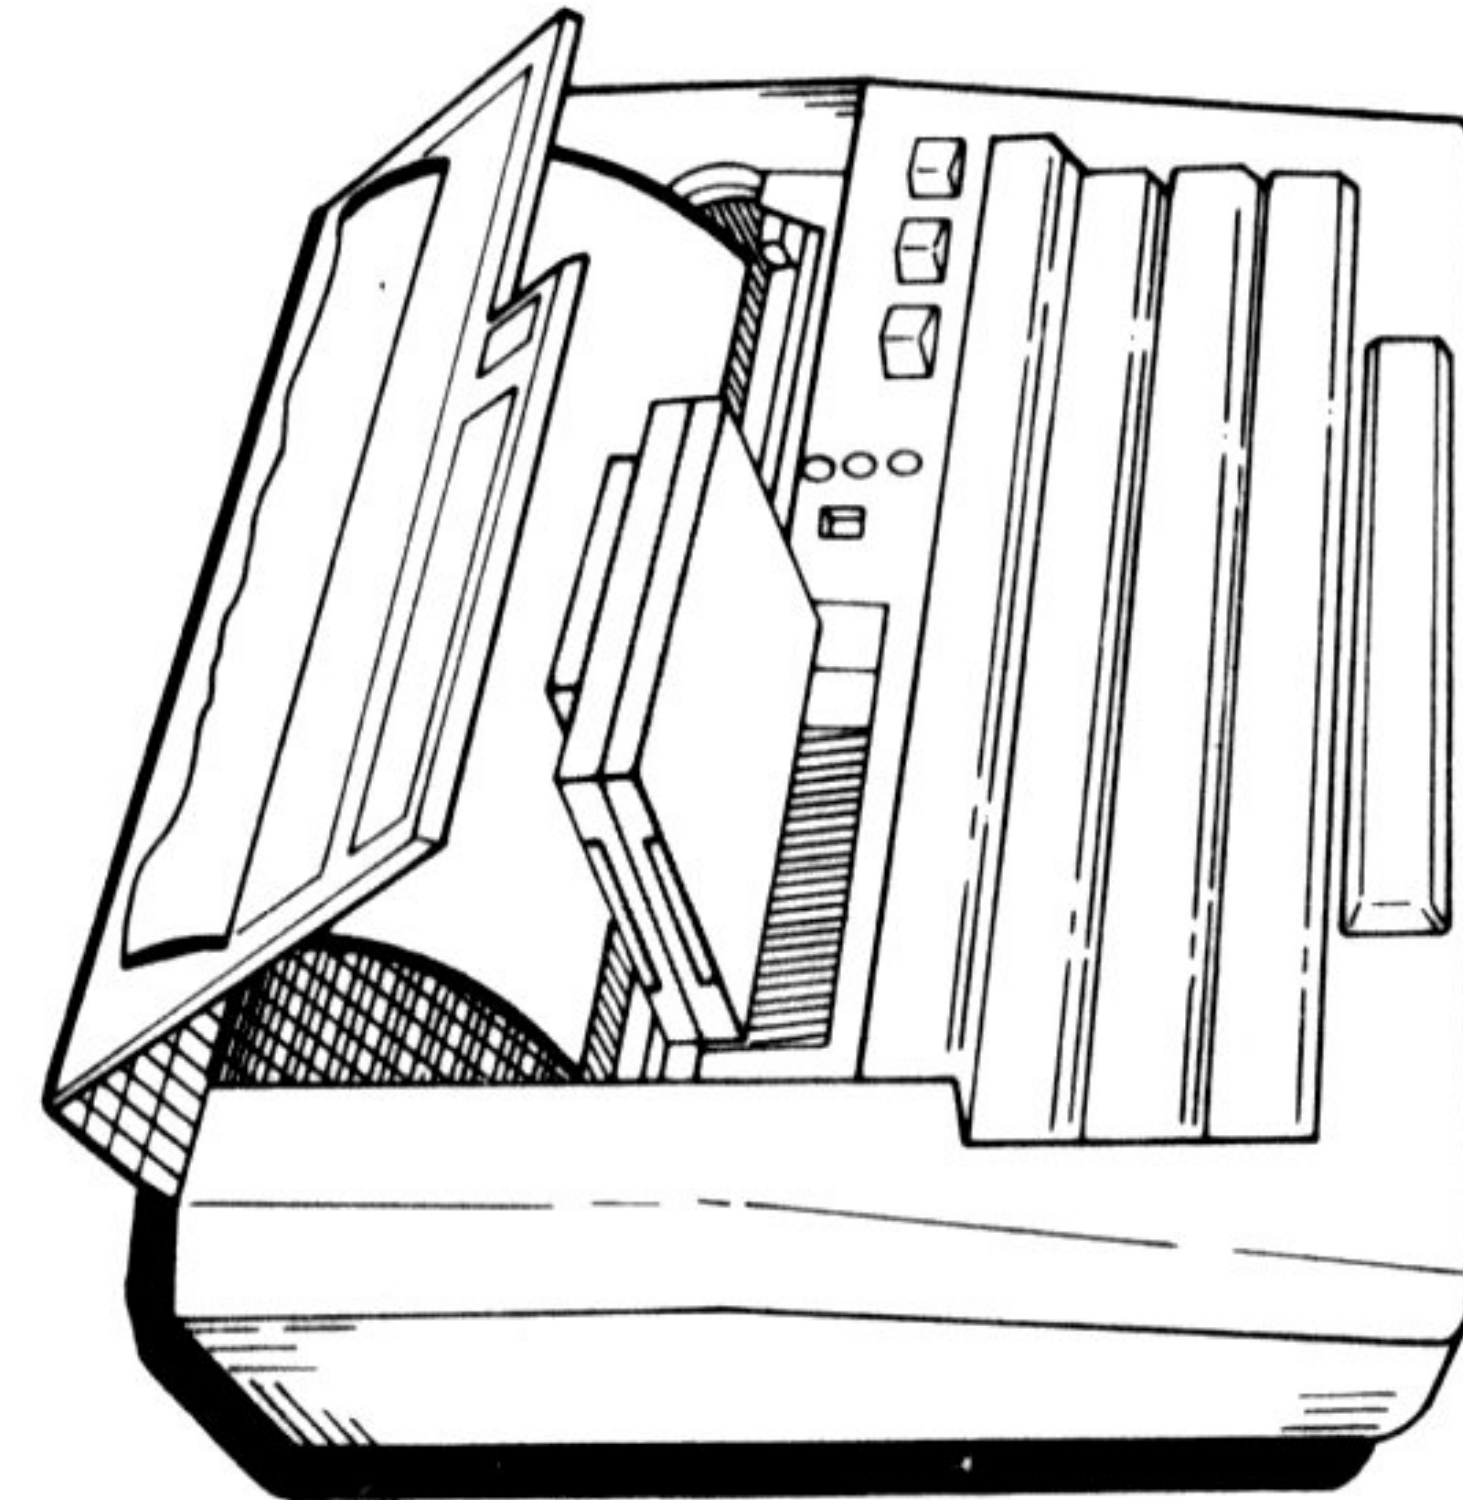

2310462-1


TO SELECT A COMMAND

1. Press the CMD key.
2. Type a letter for the command mnemonic.

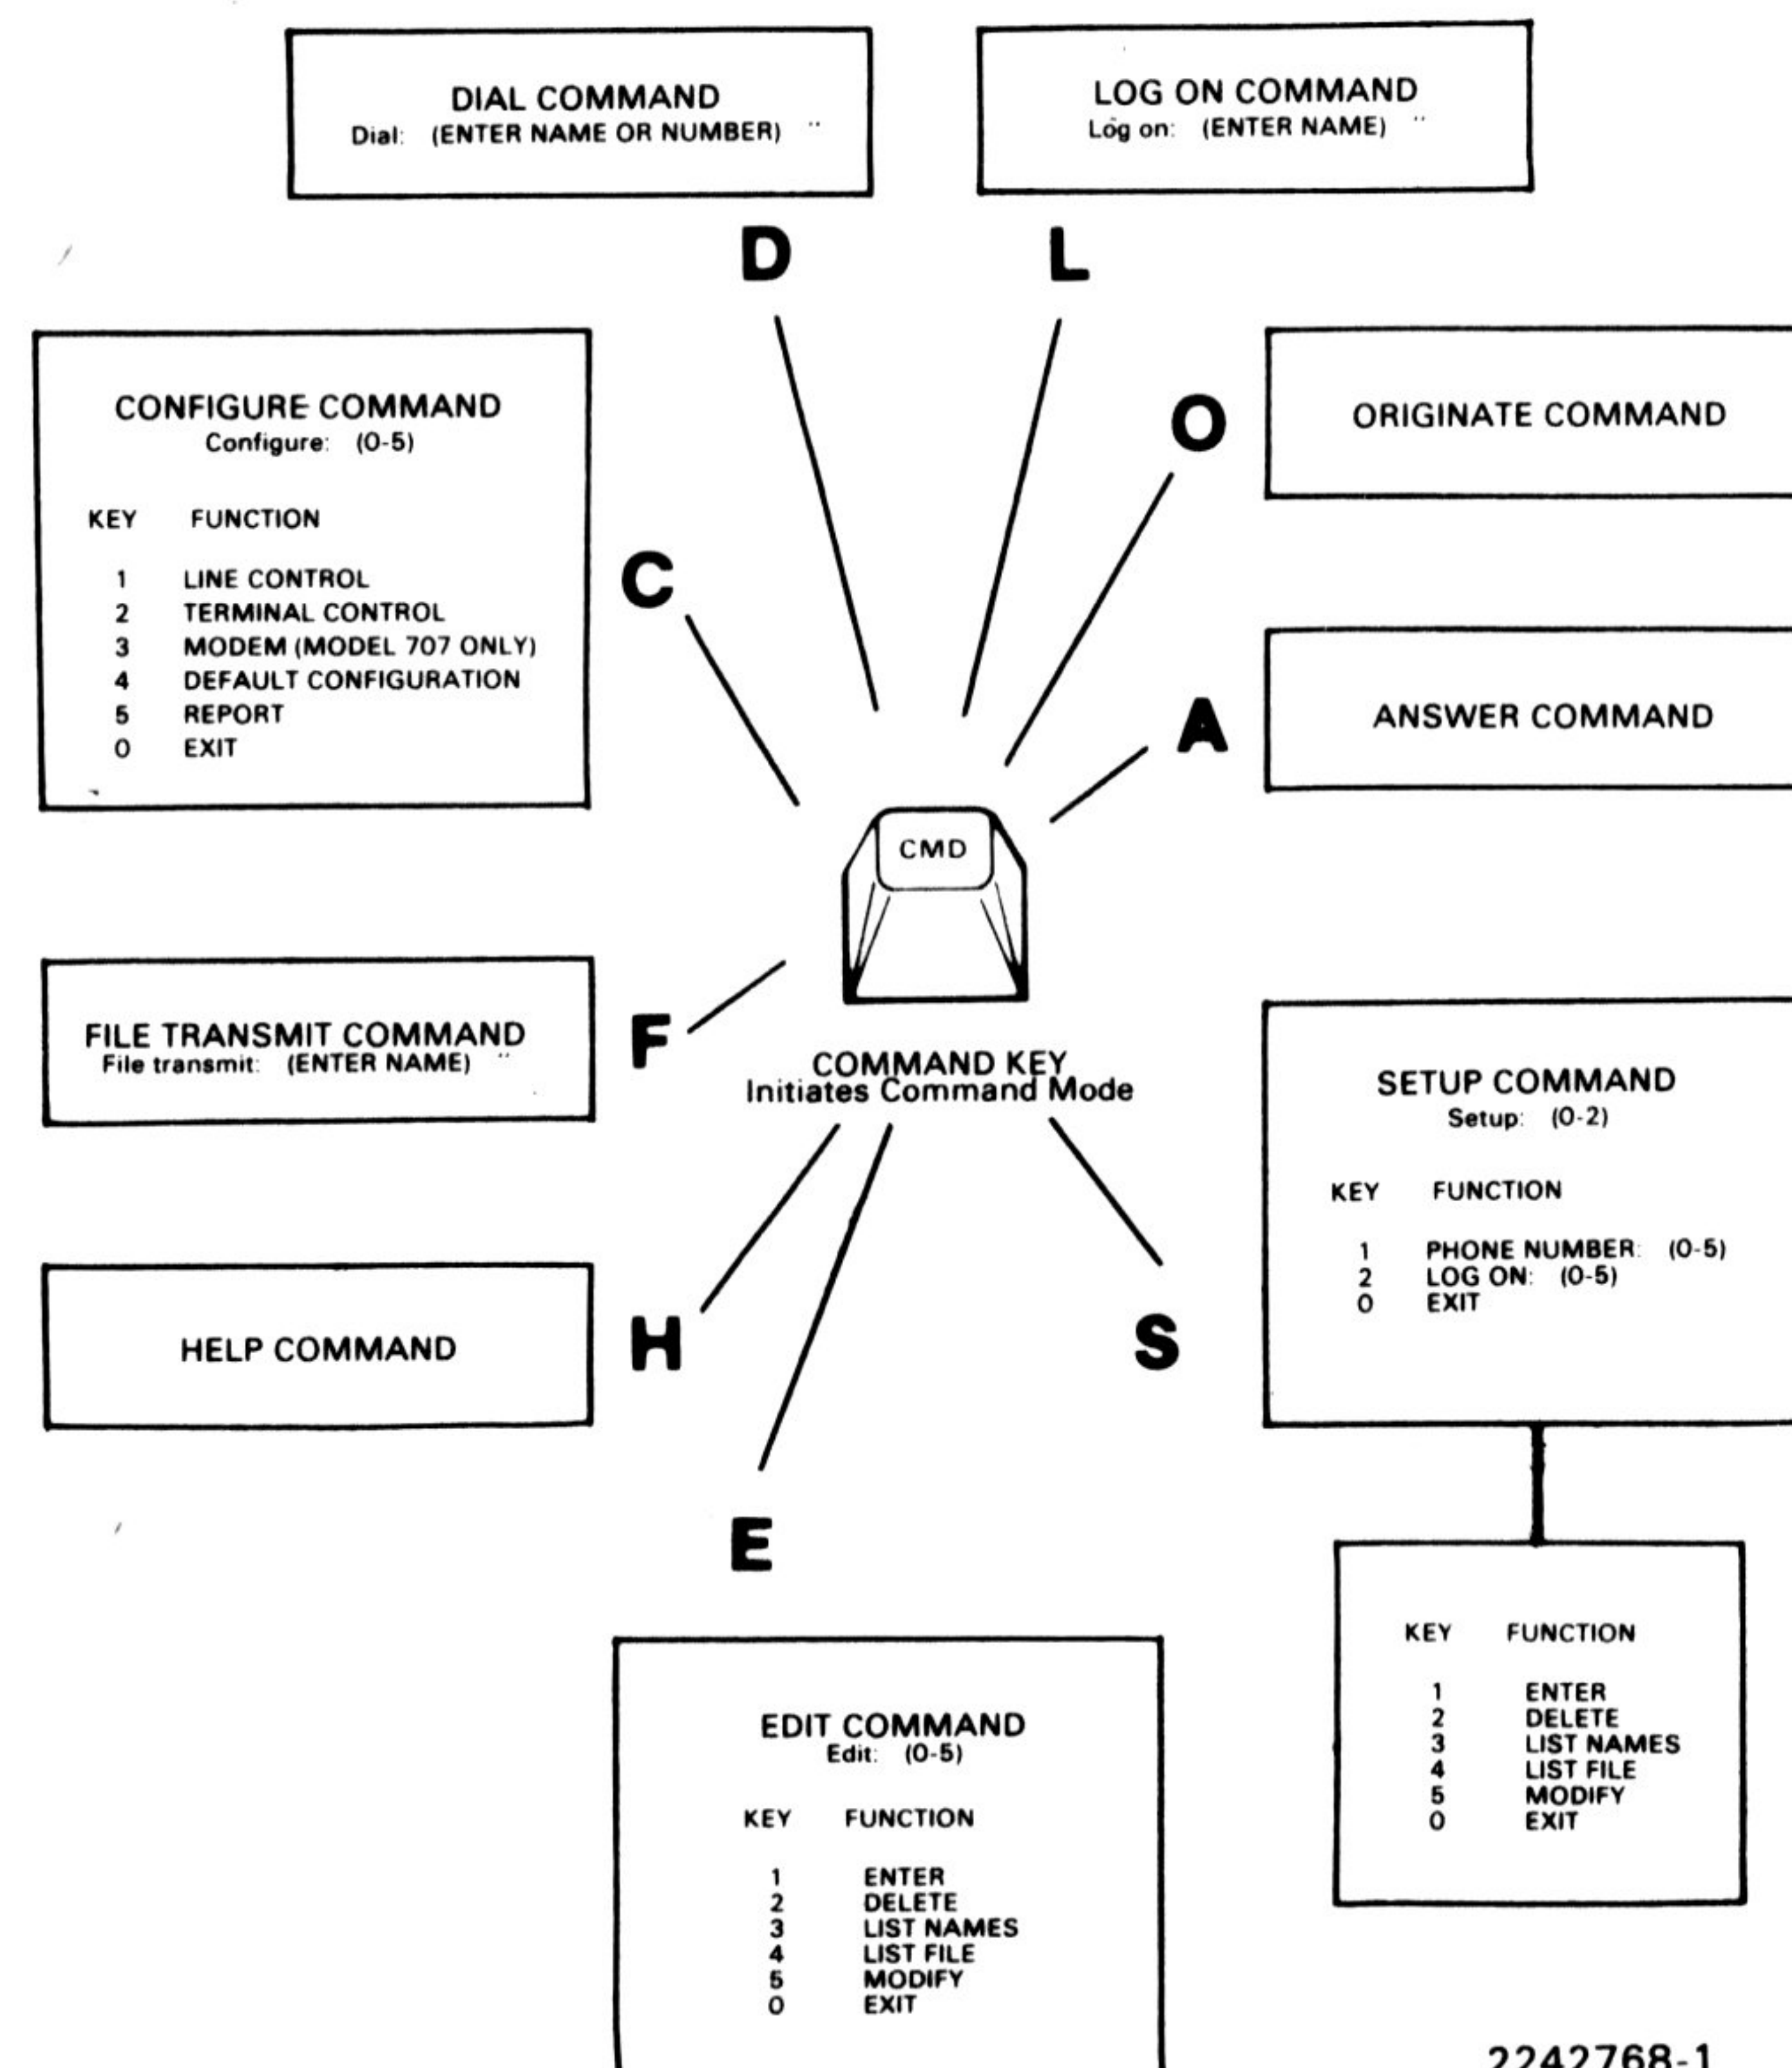


TO USE THE SETUP COMMAND

1. Press CMD then press S.
2. Type 1 or 2 for either phone number setup or log on setup. Press RTN for the menu.
3. Type a number for enter, delete, list names, list file, or modify. Press RTN for the menu.

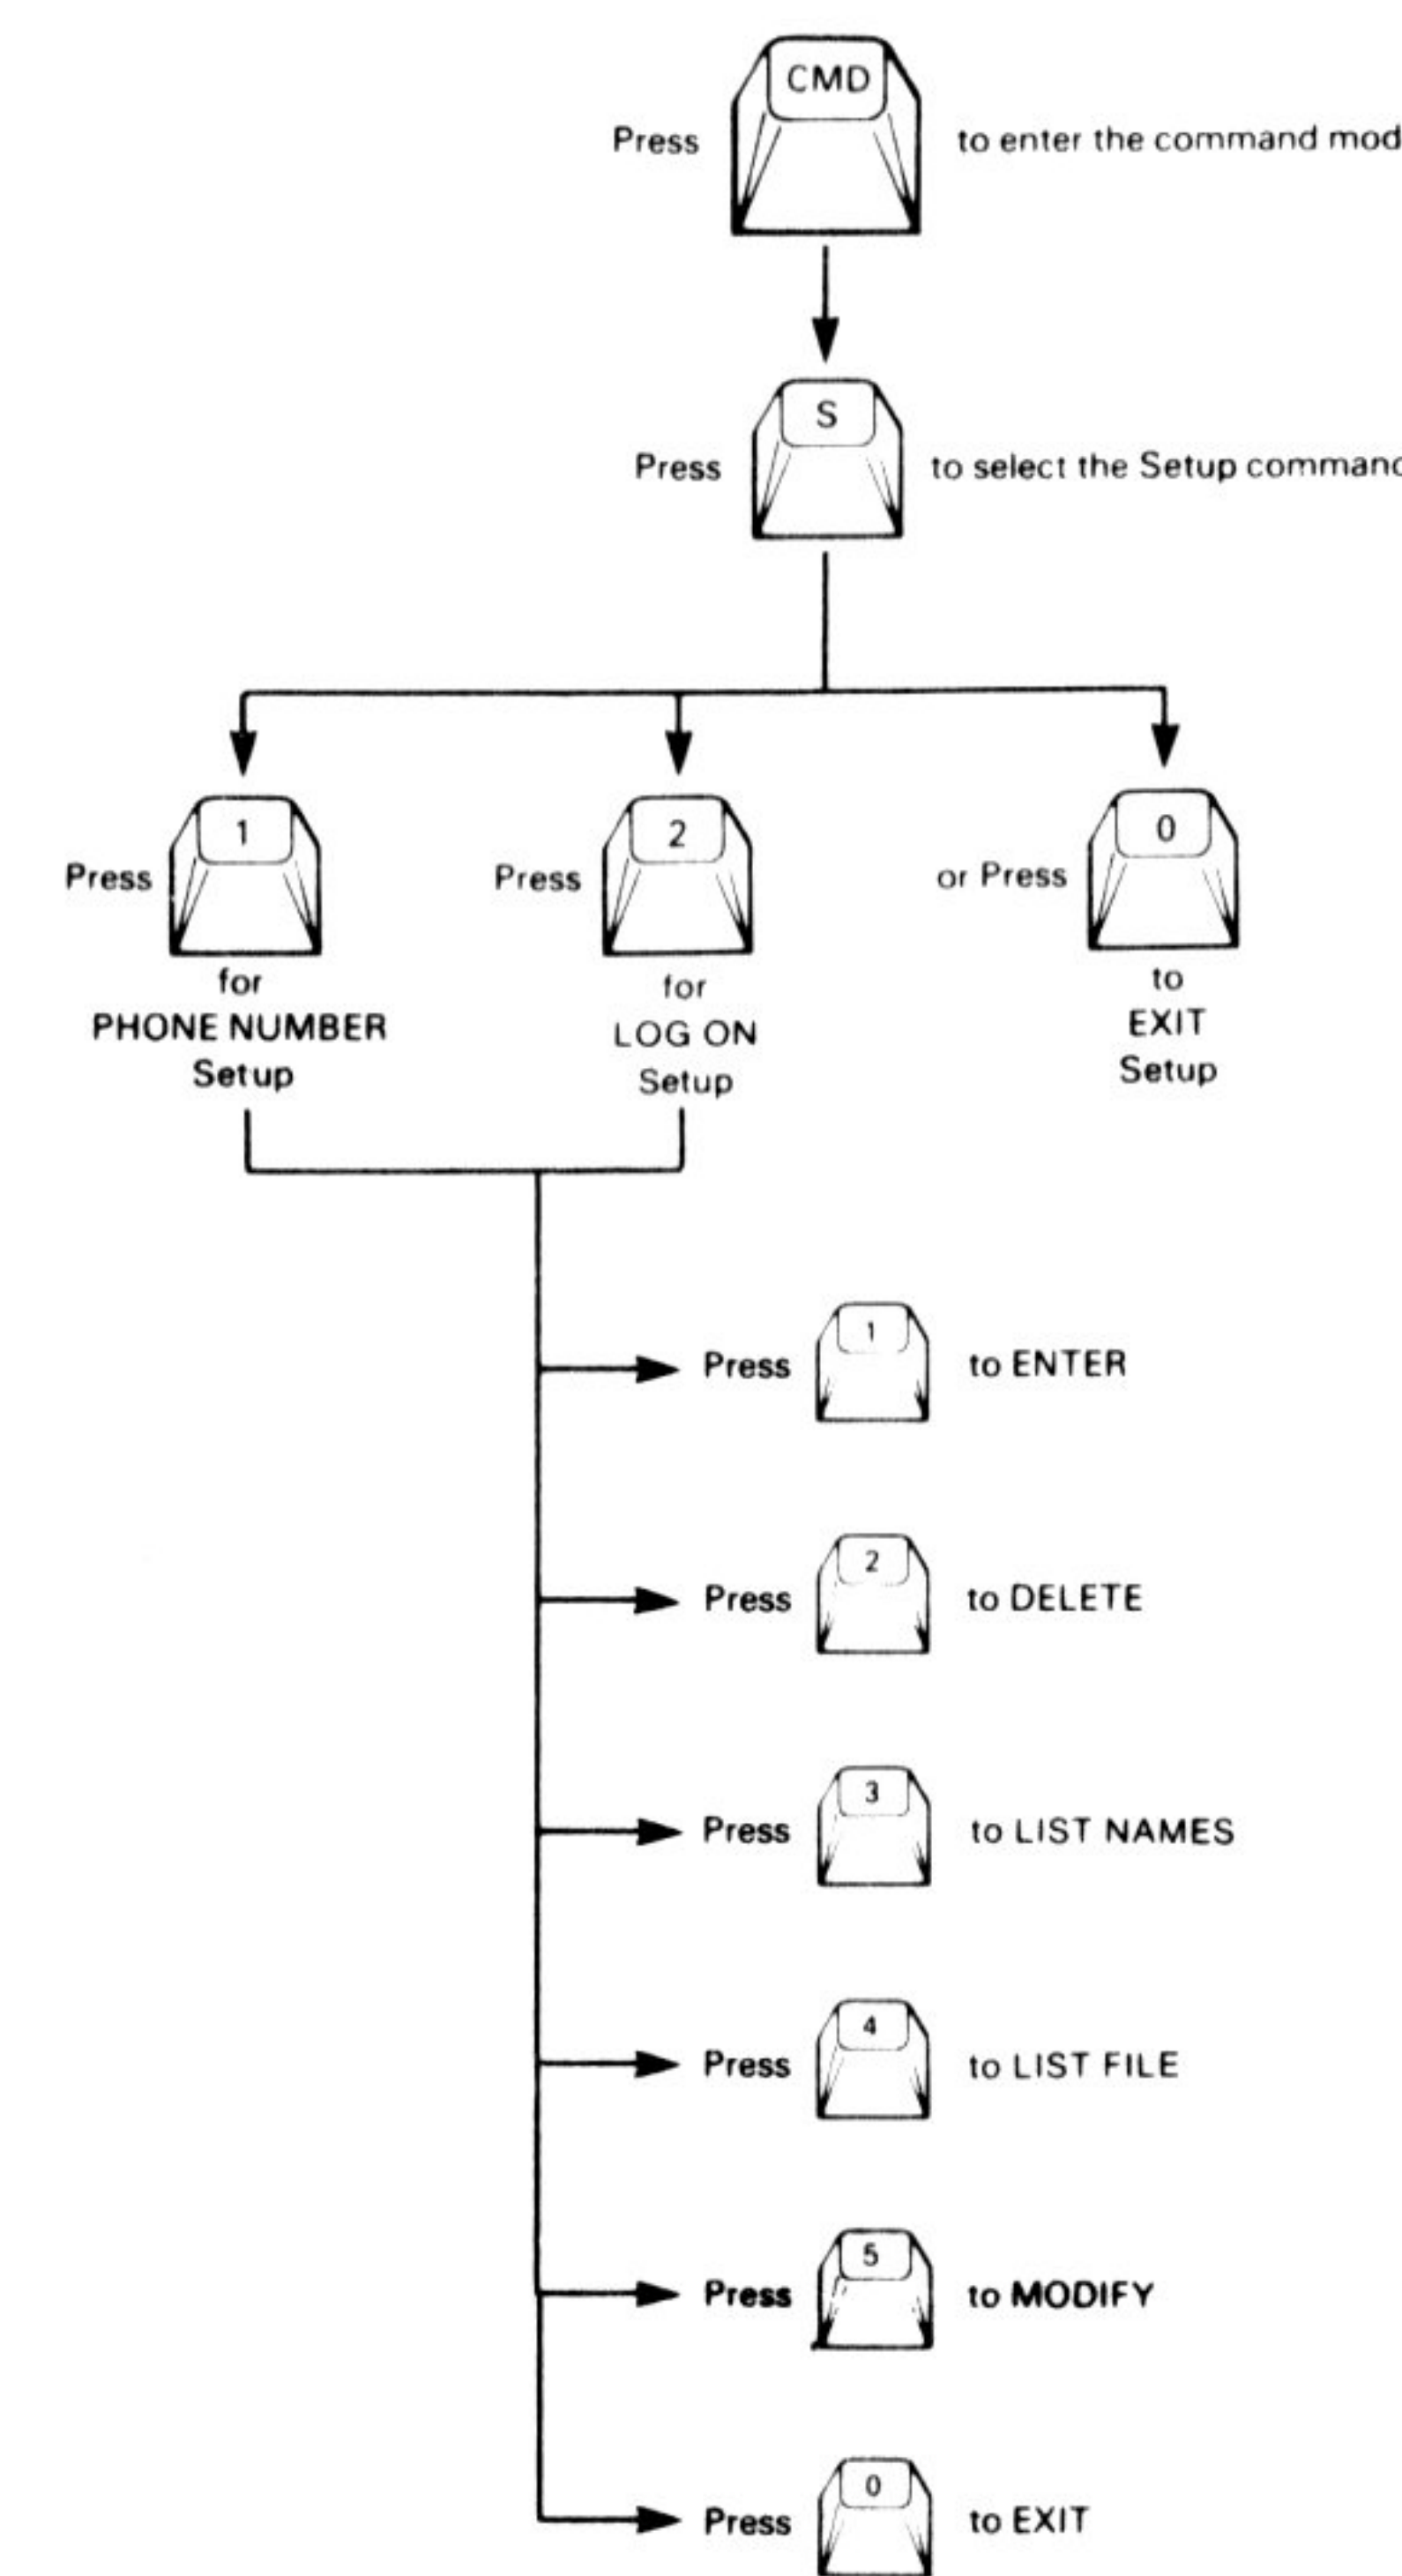

TO USE THE EDIT COMMAND

1. Press CMD then press E.
2. Type a number for enter, delete, list names, list file, or modify. Press RTN for the menu.

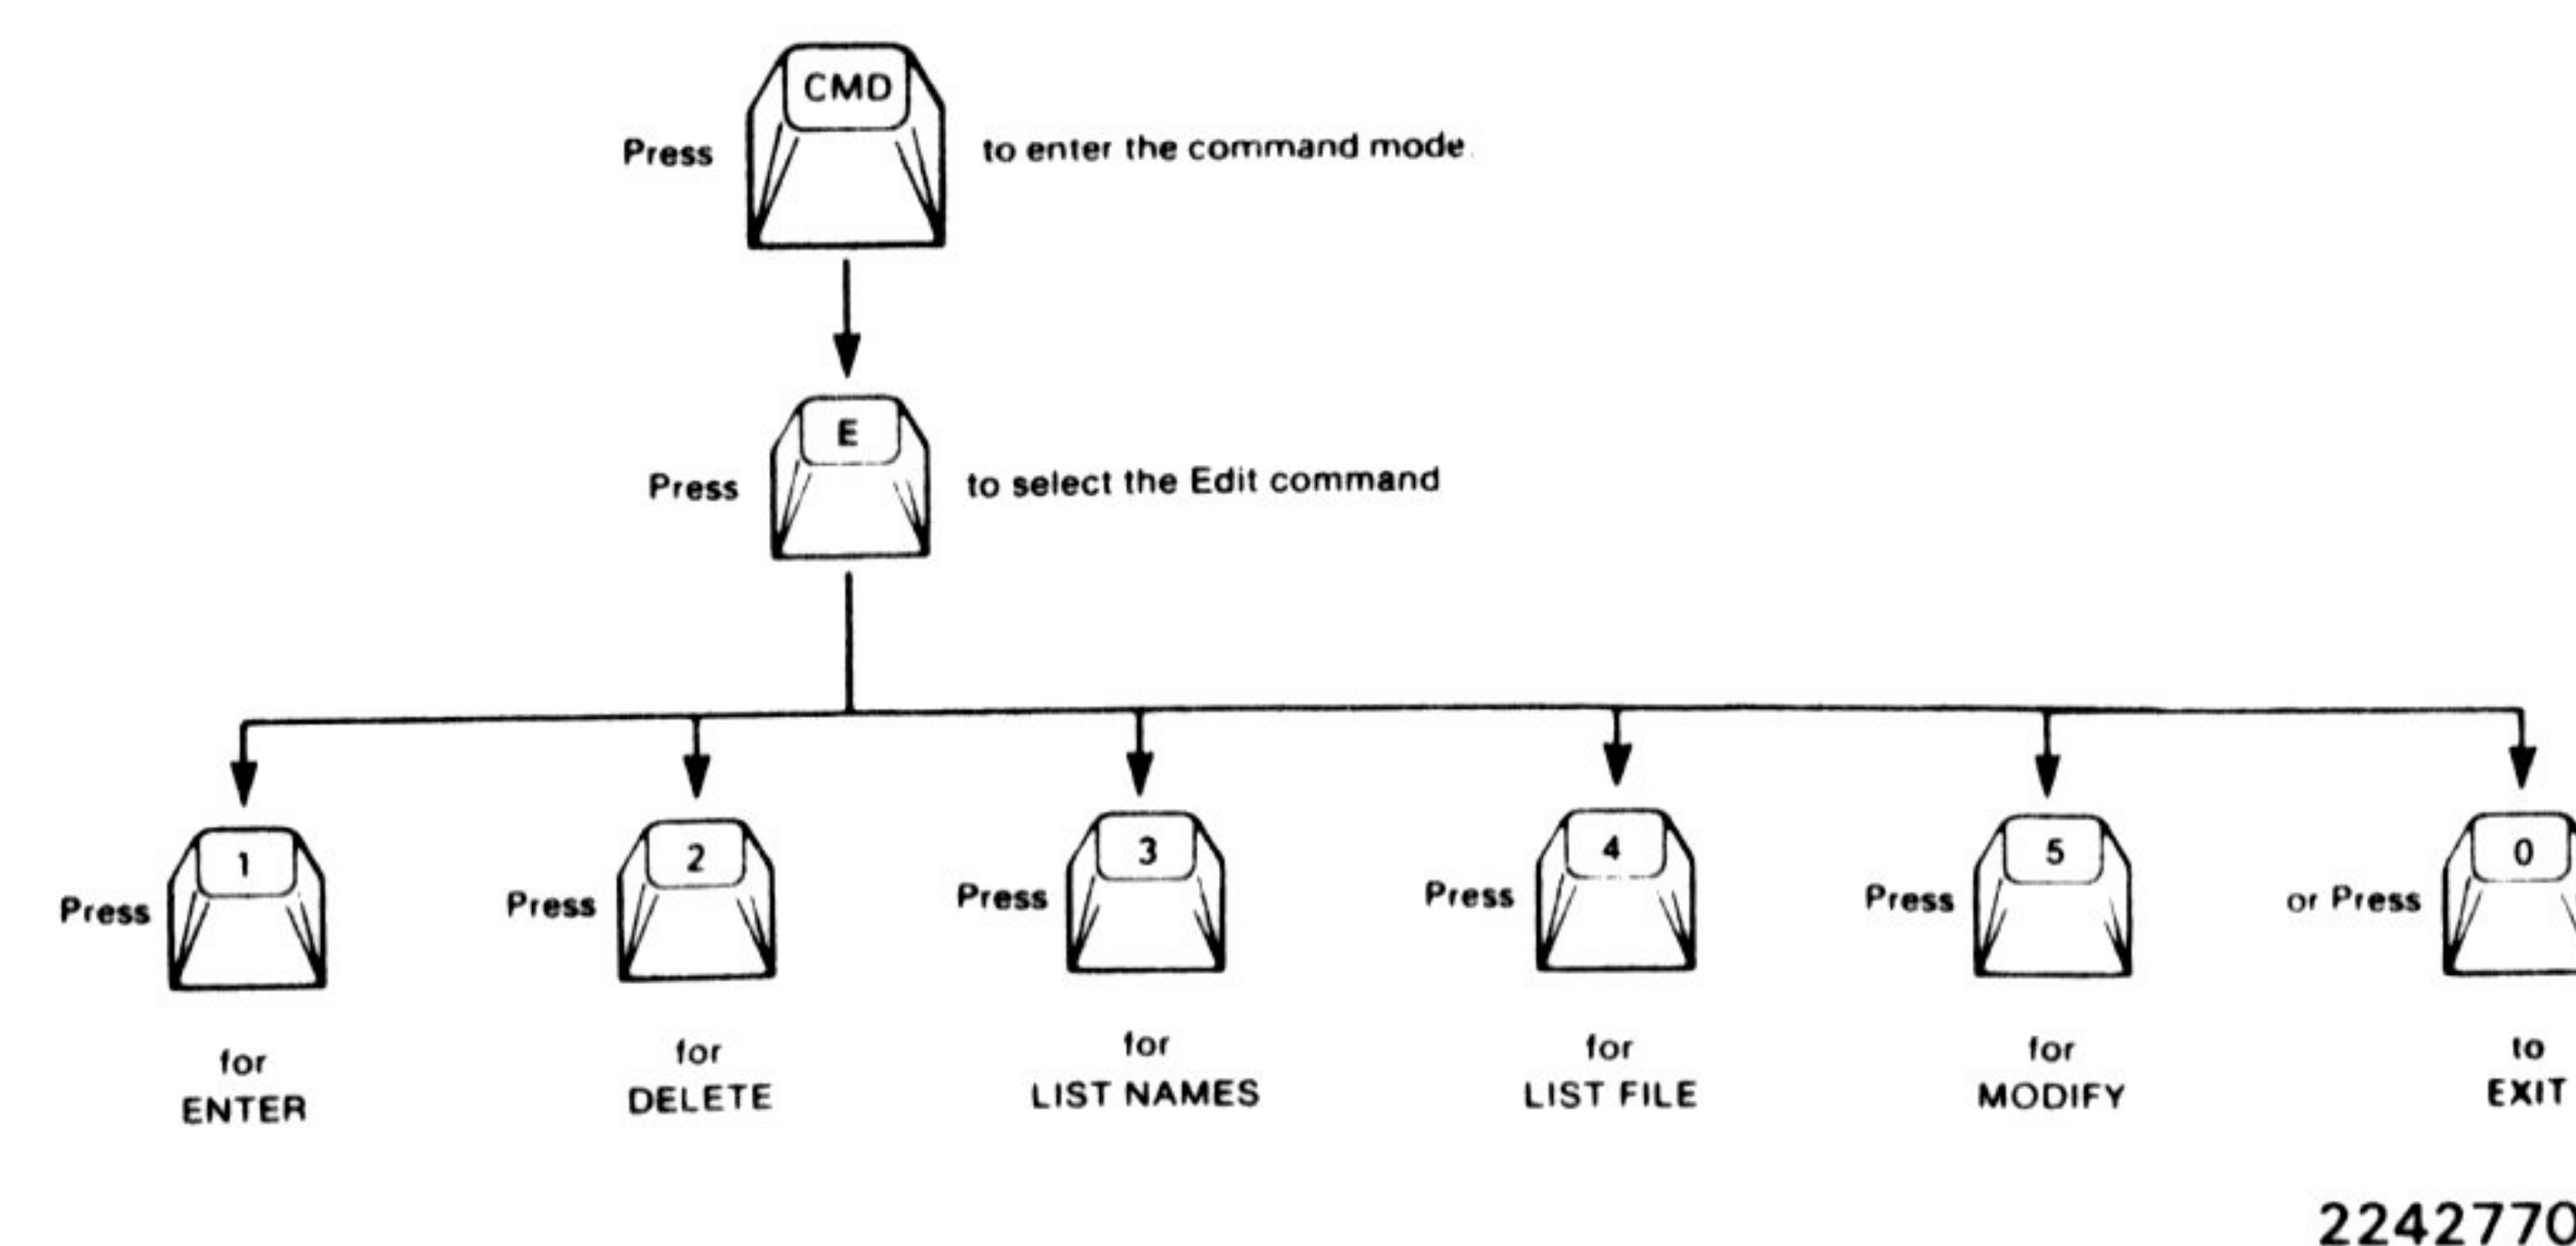

TO USE THE DIAL COMMAND (MODEL 707 ONLY)

1. Press CMD then press D.
2. If you forget phone number names, press RTN to list them.
3. Type phone number name or phone number and press RTN.

If the phone number references a log on, the terminal transmits the log on sequence automatically.

TO USE THE LOG ON COMMAND

1. Establish the communication link manually or by using the Dial command.
2. Press CMD then press L.
3. If you forget log on names, press RTN to list them.
4. Type the log on name (not the log on sequence) then press RTN.

TO USE THE FILE TRANSMIT COMMAND

1. Establish communication with a host using the Dial or Log on command.
2. Press CMD then press F.
3. If you forget file names, press RTN to list them.
4. Type the file name and press RTN.

MENUS

Editing Buffer Cartridge commands are menu assisted. If you forget valid command mnemonics or need more information about choices, press RTN.

- Configure, Setup, Edit commands: RTN key in response to prompt gives you menu of subcommand mnemonics.
- Dial, Log on, File transmit commands: RTN key in response to prompt gives you list of phone number names, log on names or file names respectively.